



Nickel



Cloud



Sand



Currant



Pebble




Salt Flats



Camel



Tawny




Harbor



Scandi




Fawn

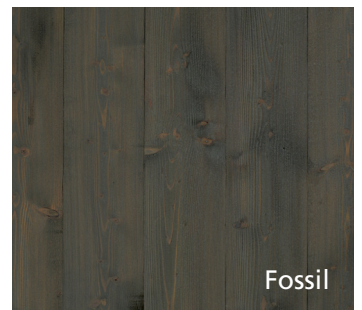


Fossil



Storm




Clay




Grove




Pinecone




Black



Hazy



Cocoa

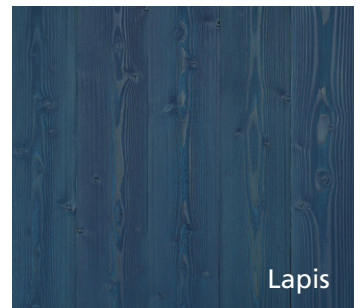

Lapis

# Pioneer Millworks | Larch Shiplap

Pioneer Millworks Larch Siding and Shiplap is PEFC sourced Larch. The signature swirling grain and small tight knots of larch brings a natural finish to vertical applications. The rot resistance of this underutilized species rivals that of Douglas fir, and it is locally grown in the Pacific Northwest which makes it a great option for exterior or interior uses. Pair it with one of our color options which show off the wood grain patterns through hue and tone; it has been brushed which enhances color saturation & adhesion. Also available pre-primed for easy application of paint colors.

## CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

06 42 00—Wood Paneling  
07 46 23—Wood Siding

## MANUFACTURER

Pioneer Millworks East  
1180 Commercial Drive  
Farmington, NY 14425  
Phone: 800-951-9663

Pioneer Millworks West  
2655 NE Orchard Ave.  
McMinnville, OR 97128  
Phone: 503-437-9017

## MATERIALS

1. **Product Name:** Larch Siding & Shiplap
2. **Species/Description:** Western Larch (*Larix occidentalis*). Brushed for superior finish adhesion and color longevity
3. **Source:** PEFC-Certified Sources
4. **Color:** Available prefinished or unfinished, standard and custom colors available. Unfinished wood tone ranges from cream to light brown; color variation is inherent to the product.
5. **Grade:** Sound Tight Knots (STK).
6. **Dimensions:**  
**Solid—Shiplap**  
TH—5/8"  
WD—5" face  
LG—8' to 16' random, called lengths available.
7. **Milling:** Shiplap no reveal, shiplap "nickel-gap", square-edge (S4S), or TGBVE.
8. **Finish:** Unfinished or prefinished with a exterior sealer as specified (2 coats face, one coat back).
9. **Hardness:** 830  
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled).
10. **FSC Claim:** None.

## ADDITIONAL INFORMATION

**Heartwood:** No restriction.

**Grain:** No restriction.

**Knots:** No limitations on sound knots, surface defects from chipped or open knots may be present.

**Texture:** Brushed.

**Voids:** Occasional blown out knots up to 1" diameter may be present.

**Checks:** Checks allowed so long as material integrity is not adversely affected.

**Moisture Content:** Kiln dried 12–15% prior to milling.

## LEED INFORMATION

**Mrc3:** N/A

**Mrc4:** N/A

**Mrc5:** Regional Materials (call for details).

**Mrc7:** N/A

## RECOMMENDED OVERAGE

Recommend 10-15% additional material for on-site grading, trimming and installation factors.



Shown Unfinished



Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.